

(12) **United States Patent**  
**Bohr**

(10) **Patent No.:** **US 9,159,566 B2**  
(45) **Date of Patent:** **Oct. 13, 2015**

(54) **REPLACEMENT METAL GATES TO  
ENHANCE TRANSISTOR STRAIN**

(71) Applicant: **Intel Corporation**, Santa Clara, CA  
(US)

(72) Inventor: **Mark T. Bohr**, Aloha, OR (US)

(73) Assignee: **Intel Corporation**, Santa Clara, CA  
(US)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/573,242**

(22) Filed: **Dec. 17, 2014**

(65) **Prior Publication Data**

US 2015/0104935 A1 Apr. 16, 2015

**Related U.S. Application Data**

(60) Continuation of application No. 13/909,792, filed on  
Jun. 4, 2013, now Pat. No. 8,946,016, which is a  
continuation of application No. 13/233,297, filed on  
Sep. 15, 2011, now abandoned, which is a division of  
application No. 11/305,465, filed on Dec. 16, 2005,  
now Pat. No. 8,101,485.

(51) **Int. Cl.**

**H01L 21/28** (2006.01)  
**H01L 29/49** (2006.01)  
**H01L 29/51** (2006.01)  
**H01L 29/78** (2006.01)  
**H01L 21/8238** (2006.01)  
**H01L 29/66** (2006.01)  
**H01L 29/165** (2006.01)

(52) **U.S. Cl.**

CPC .... **H01L 21/28008** (2013.01); **H01L 21/28088**  
(2013.01); **H01L 21/823842** (2013.01); **H01L**  
**21/823857** (2013.01); **H01L 29/4966** (2013.01);  
**H01L 29/517** (2013.01); **H01L 29/66545**  
(2013.01); **H01L 29/66583** (2013.01); **H01L**  
**29/78** (2013.01); **H01L 29/7843** (2013.01);  
**H01L 29/7848** (2013.01); **H01L 21/823807**  
(2013.01); **H01L 21/823828** (2013.01); **H01L**  
**29/165** (2013.01)

(58) **Field of Classification Search**

CPC ..... **H01L 21/823142**; **H01L 21/28088**;  
**H01L 21/8234**; **H01L 29/66545**; **H01L**  
**21/28008**; **H01L 29/743**  
USPC ..... **438/199**, **216**, **261**, **275**, **287**, **591**  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

8,946,016 B2 *	2/2015	Bohr	438/199
2003/0098491 A1 *	5/2003	Tsutsumi	257/506
2004/0137703 A1 *	7/2004	Gao et al.	438/592
2005/0095852 A1 *	5/2005	Saenger et al.	438/672
2005/0245036 A1 *	11/2005	Datta et al.	438/287
2006/0286758 A1 *	12/2006	Liang et al.	438/305

\* cited by examiner



*Primary Examiner* — Thanhha Pham

(74) *Attorney, Agent, or Firm* — Blakely, Sokoloff, Taylor &  
Zafman LLP

(57) **ABSTRACT**

Some embodiments of the present invention include appara-  
tuses and methods relating to NMOS and PMOS transistor  
strain.

**9 Claims, 4 Drawing Sheets**

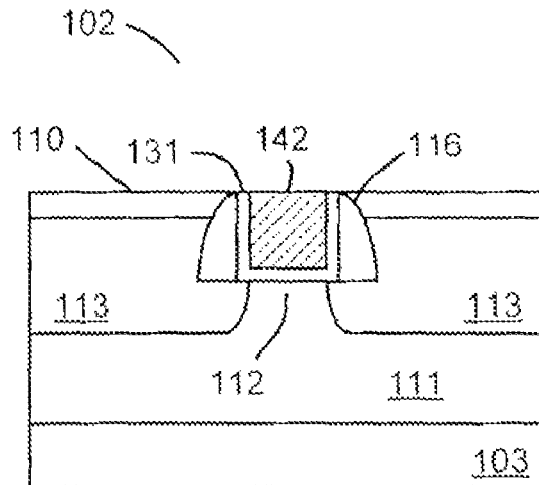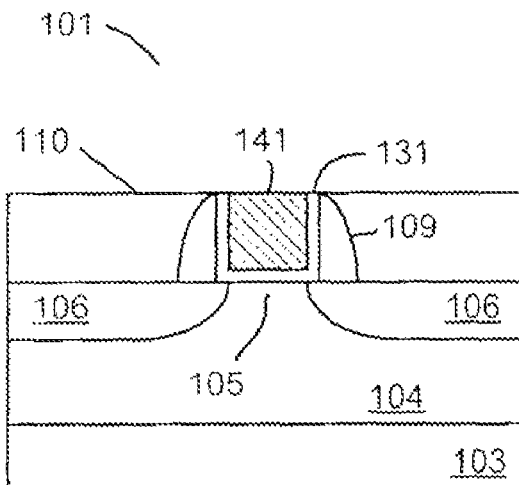

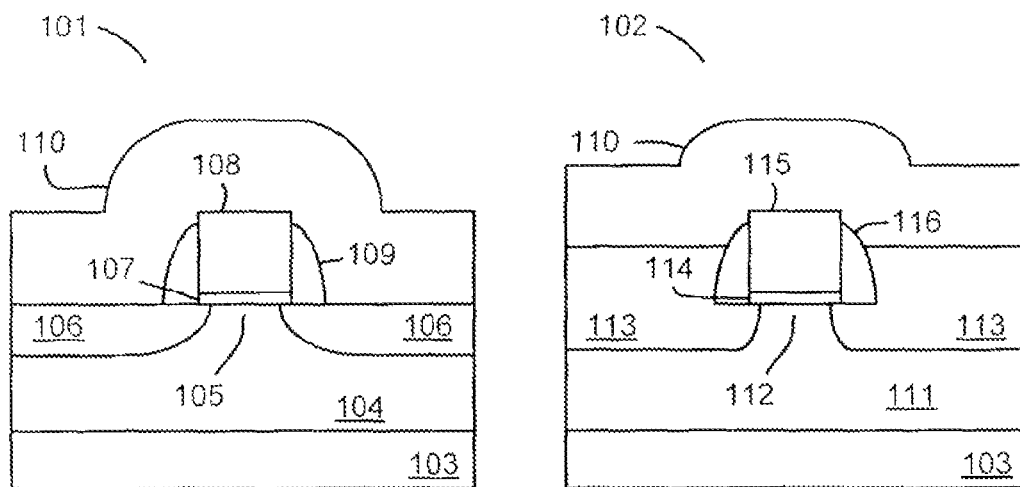


FIG. 1

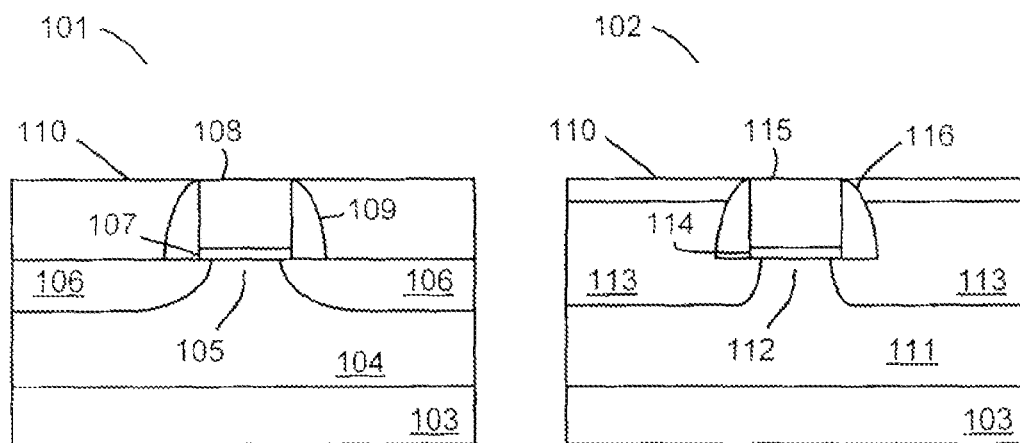


FIG. 2

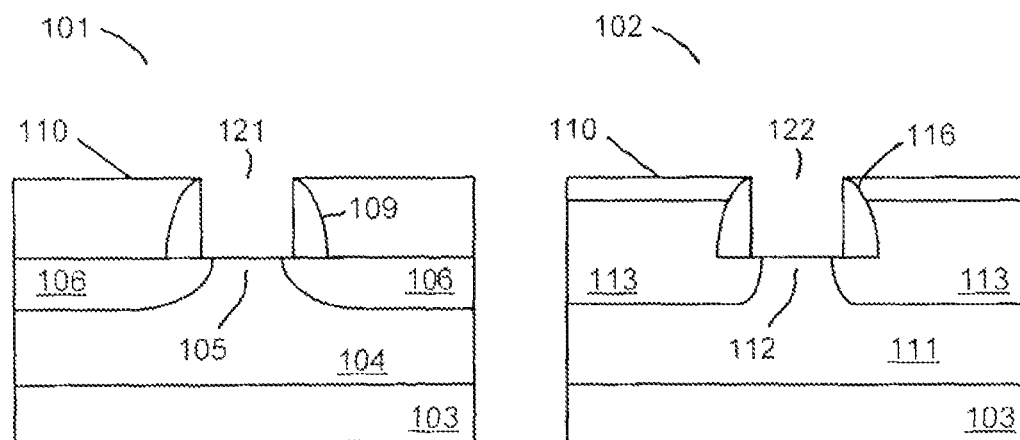


FIG. 3

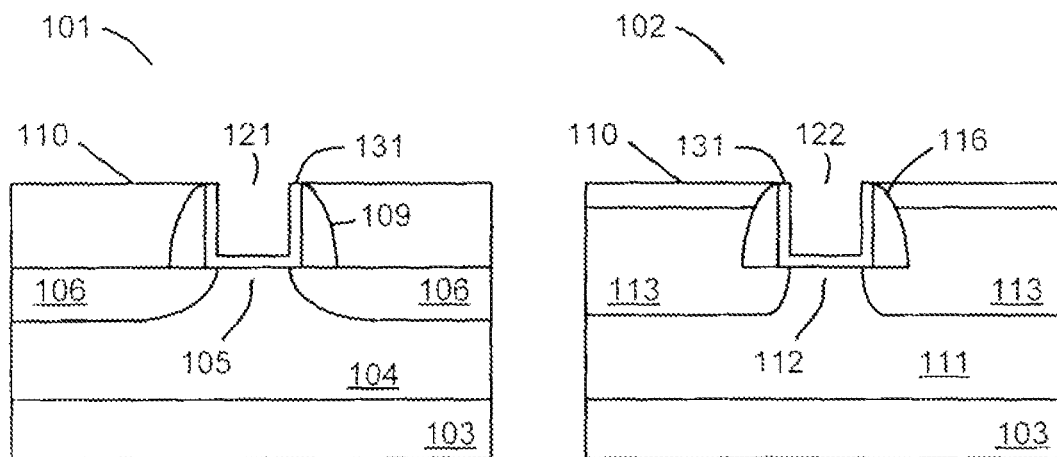


FIG. 4

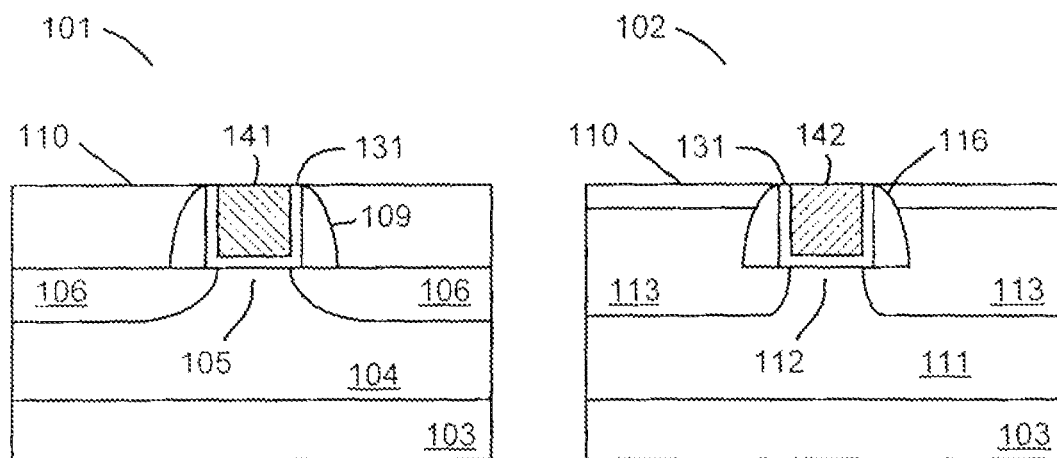


FIG. 5

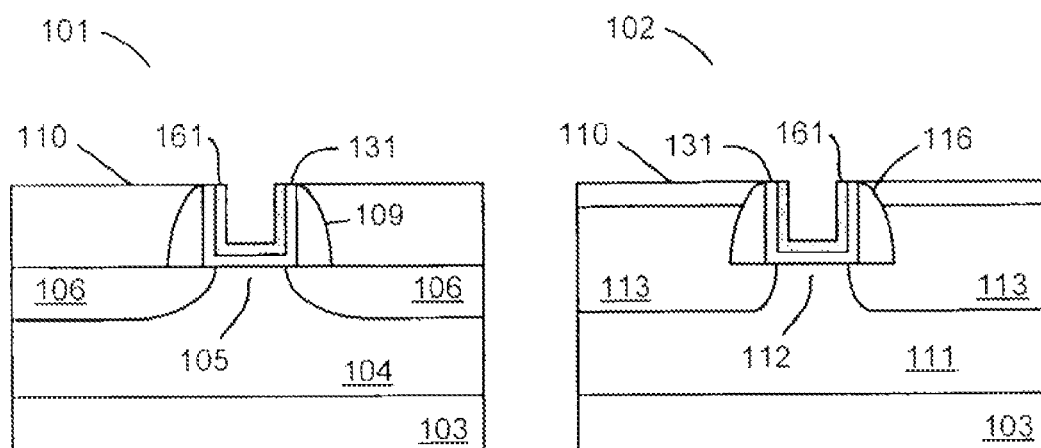


FIG. 6

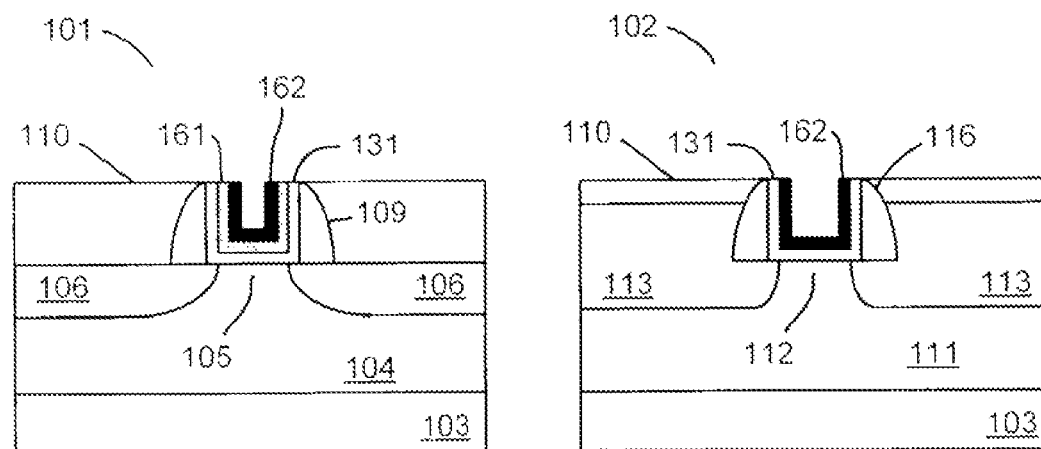


FIG. 7

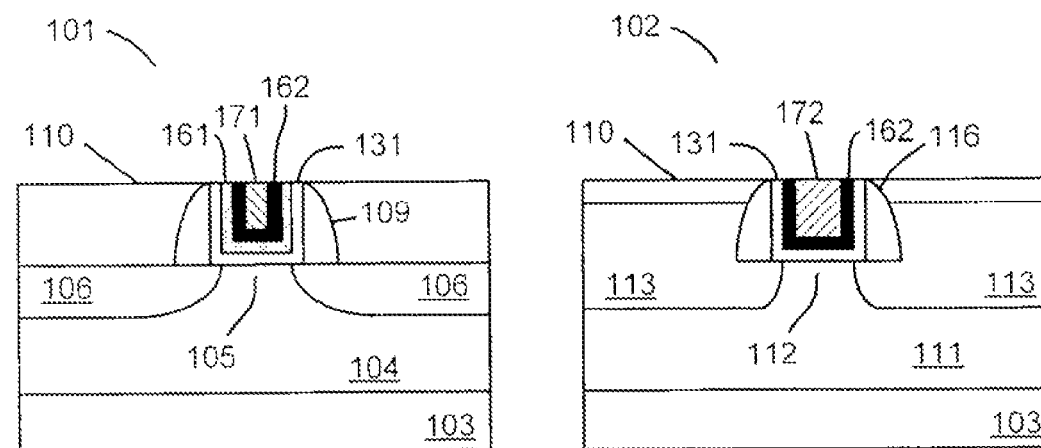


FIG. 8

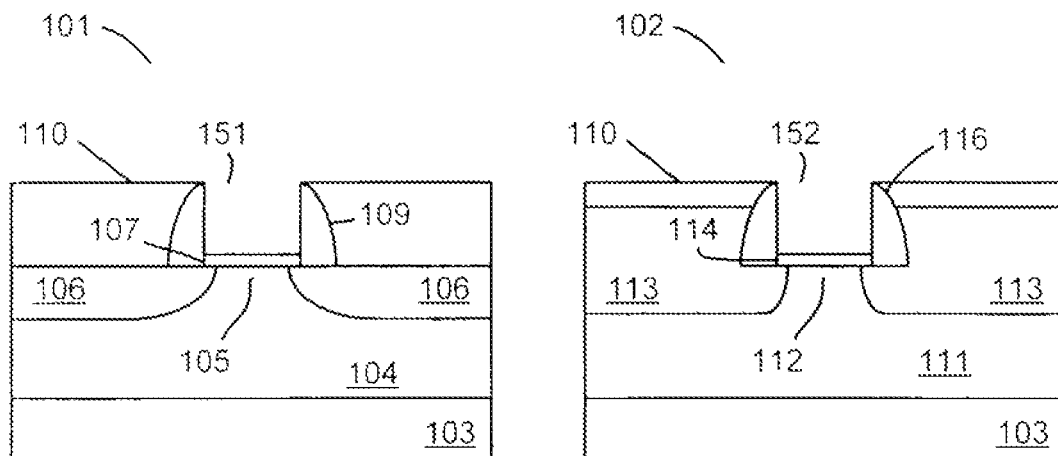


FIG. 9

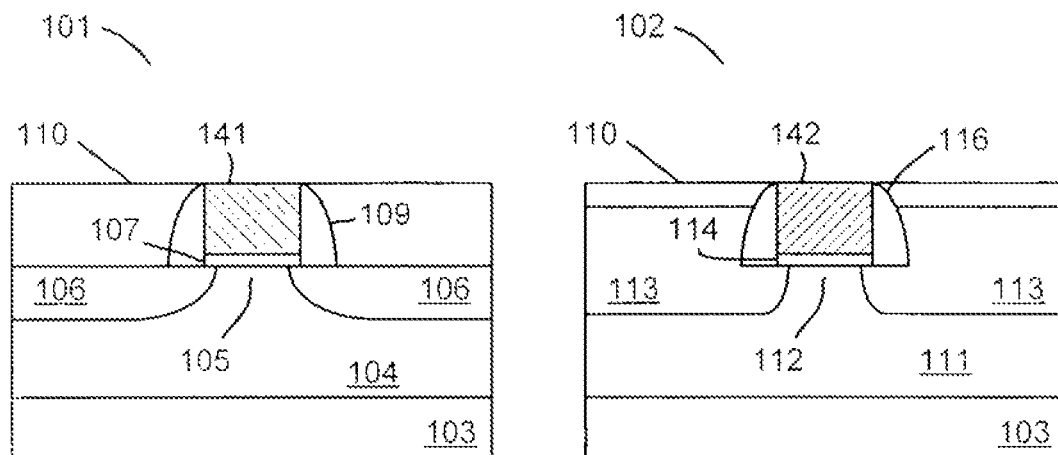


FIG. 10

REPLACEMENT METAL GATES TO  
ENHANCE TRANSISTOR STRAIN

## RELATED APPLICATION

This application is a continuation of and claims the benefit of priority of pending U.S. patent application Ser. No. 13/233,297 filed on Sep. 15, 2011 which is a divisional of U.S. patent application Ser. No. 11/305,465 filed Dec. 16, 2005, now issued U.S. Pat. No. 8,101,485.

## BACKGROUND

In semiconductor processing, transistors may be formed on semiconductor wafers. The transistors may include a gate structure having a gate dielectric and a gate electrode, a source, a drain, and a channel region between the source and the drain. In CMOS (complimentary metal oxide semiconductor) technology, transistors may typically be of two types: NMOS (negative channel metal oxide semiconductor) or PMOS (positive channel metal oxide semiconductor) transistors. The transistors and other devices may be interconnected to form integrated circuits (ICs) which perform numerous useful functions.

The performance of the ICs may directly depend on the performance of the transistors. Transistor performance may be improved by providing a strain in the channel region. Specifically, NMOS transistor performance may be improved by providing a tensile strain in the channel region and PMOS transistor performance may be improved by providing a compressive strain in the channel region.

## BRIEF DESCRIPTION OF THE DRAWINGS

The invention is illustrated by way of example and not by way of limitation in the figures of the accompanying drawings, in which the like references indicate similar elements and in which:

FIG. 1 is a cross-sectional view of a partially formed NMOS transistor and a partially formed PMOS transistor, and a layer over the transistor gate structures.

FIG. 2 is a view similar to FIG. 1 with a portion of the layer removed to expose the gate structures.

FIG. 3 is a view similar to FIG. 2 with the transistor gate structures removed to form trenches.

FIG. 4 is a view similar to FIG. 3 with a gate dielectric formed in the trenches.

FIG. 5 is a view similar to FIG. 4 with gate electrodes formed in the trenches.

FIG. 6 is a view similar to FIG. 4 with an n-type material formed in the trenches.

FIG. 7 is a view similar to FIG. 6 with a portion of the n-type material removed and a p-type material formed in the trenches.

FIG. 8 is a view similar to FIG. 7 with fill materials formed in the trenches.

FIG. 9 is a view similar to FIG. 2 with a portion of the gate structures removed to form trenches.

FIG. 10 is a view similar to FIG. 9 with gate electrodes formed in the trenches.

The following Detailed Description is provided with reference to the accompanying figures. In the figures, the left-most digit(s) of a reference number usually identifies the figure in which the reference number first appears. The use of the same reference numbers in different figures indicates similar or identical items.

## DETAILED DESCRIPTION

In various embodiments, apparatuses and methods relating to strained transistors are described. However, various embodiments may be practiced without one or more of the specific details, or with other methods, materials, or components. In other instances, well-known structures, materials, or operations are not shown or described in detail to avoid obscuring aspects of various embodiments of the invention. Similarly, for purposes of explanation, specific numbers, materials, and configurations are set forth in order to provide a thorough understanding of the invention. Nevertheless, the invention may be practiced without specific details. Furthermore, it is understood that the various embodiments shown in the figures are illustrative representations and are not necessarily drawn to scale.

Transistor performance characteristics, such as transistor drive current, may be enhanced by providing strain to the transistor channels. For example, NMOS transistor performance may improve when the NMOS transistor channel is under lateral tensile stress. Also, PMOS transistor performance may improve when the PMOS transistor channel is under lateral compressive stress. Briefly, the present invention may provide for increased channel strain to enhance the performance of NMOS and PMOS transistors.

FIG. 1 illustrates an NMOS transistor **101** and a PMOS transistor **102** on a substrate **103**. NMOS transistor **101** and PMOS transistor **102** may be on a continuous substrate **103**. However, they are illustrated separately in FIGS. 1-10 for the sake of clarity. Substrate **103** may include any suitable semiconductor material. In an embodiment, substrate **103** may include monocrystalline silicon. Substrate **103** may also include isolation structures (not shown) to isolate the NMOS and PMOS transistors.

As shown, PMOS transistor **102** includes an n-well **111**, a channel **112**, source and drain films **113**, a gate dielectric **114**, a gate electrode **115** and spacers **116**. PMOS transistor **102** may be formed by any suitable processing techniques.

N-well **111** may include any suitable n-type dopants, such as phosphorus and arsenic, and may be formed by any suitable technique. In an embodiment, n-well **111** may be formed by doping substrate **103** by ion implantation.

Channel **112** may be under a compressive strain from any stressor source or material. As discussed, a compressive strain may increase the performance of PMOS transistor **102**. In an embodiment, source and drain films **113** may provide a compressive strain on channel **112**. In such embodiments, source and drain films **113** may therefore be considered stressors. In an embodiment, source and drain films **113** may be epitaxial and may have a greater lattice spacing constant than n-well **111** and channel **112**. Source and drain films **113** may transfer a compressive strain on channel **112** as they tend to, but are constrained from, expanding to their natural lattice spacing. In an embodiment, source and drain films **113** may include an alloy of materials. In an embodiment, source and drain films **113** may include an alloy of silicon and germanium. In an embodiment, source and drain films **113** may include a p-type dopant, such as boron. In an embodiment, source and drain films **113** may be formed in recesses of n-well **111**.

As illustrated, channel **112** may be under a compressive strain from source and drain films **113**. However, channel **112** may be under a compressive strain from any suitable stressor source or material. In an embodiment, a material may be formed over gate electrode **115** and spacers **116** to provide a compressive strain on channel **112**.

Gate dielectric **114** may be any suitable material. In an embodiment, gate dielectric **114** may include silicon dioxide.

In other embodiments, gate dielectric **114** may include a high-k gate dielectric. In general, a high-k gate dielectric may include any material having a dielectric constant,  $k$ , that is greater than about 3.9 (the dielectric constant of silicon dioxide). In an embodiment, gate dielectric **114** may include hafnium oxide. In other embodiments, gate dielectric **114** may include hafnium silicon oxide, lanthanum oxide, zirconium oxide, zirconium silicon oxide, tantalum oxide, titanium oxide, barium strontium titanium oxide, barium titanium oxide, strontium titanium oxide, yttrium oxide aluminum oxide, lead scandium tantalum oxide, or lead zinc niobate.

Gate electrode **115** may include any suitable material. In an embodiment, gate electrode **115** may include polysilicon. In another embodiment, gate electrode **115** may include polysilicon doped with a p-type dopant, such as boron.

Gate dielectric **114** and gate electrode **115** together may be considered a gate stack or a gate structure. In an embodiment, both gate dielectric **114** and gate electrode **115** may be a part of the gate structure. In other embodiments, the gate structure may be a single material. In other embodiments, the gate structure may include a hard mask or any number of additional materials. As is described further below, a portion or an entirety of the gate structure may be removed to enhance the strain in channel **112**. Therefore, a portion or an entirety of the gate structure may be considered sacrificial.

Spacers **116** may include any suitable dielectric materials, such as a nitride or an oxide. Spacers **116** may be along the sidewalls of gate electrode **108** and may therefore be considered sidewall spacers.

As shown, NMOS transistor **101** includes a p-well **104**, a channel **105**, source and drain regions **106**, a gate dielectric **107**, a gate electrode **108**, and spacers **109**. NMOS transistor **101** may be formed by any suitable processing techniques. P-well **104** may include any suitable p-type dopants, such as boron and indium, and may be formed by any suitable technique. Source and drain regions **106** may include any suitable n-type dopants, such as phosphorus and arsenic, and may be formed by any suitable technique, such as ion implantation or epitaxial deposition. Channel **105** may be between source and drain regions **106**.

Gate dielectric **107** may be any suitable material. In an embodiment, gate dielectric **107** may include silicon dioxide. In other embodiments, gate dielectric **107** may include a high-k gate dielectric. In an embodiment, gate dielectric **107** may include hafnium oxide. In other embodiments, gate dielectric **107** may include hafnium silicon oxide, lanthanum oxide, zirconium oxide, zirconium silicon oxide, tantalum oxide, titanium oxide, barium strontium titanium oxide, barium titanium oxide, strontium titanium oxide, yttrium oxide aluminum oxide, lead scandium tantalum oxide, or lead zinc niobate. In an embodiment, gate dielectric **107** and gate dielectric **114** may include the same material.

Gate electrode **108** may include any suitable material. In an embodiment, gate electrode **108** may include polysilicon. In another embodiment, gate electrode **108** may include polysilicon doped with an n-type dopant, such as phosphorus and arsenic.

Gate dielectric **107** and gate electrode **108** together may be considered a gate stack or a gate structure. In an embodiment, both gate dielectric **107** and gate electrode **108** may be a part of the gate structure. In other embodiments, the gate structure may be a single material. In other embodiments, the gate structure may include a hard mask or any number of additional materials. As is described further below, a portion or an entirety of the gate structure may be removed to enhance the

strain in channel **105**. Therefore, a portion or an entirety of the gate structure may be considered sacrificial.

Spacers **109** may include any suitable dielectric materials, such as a nitride or an oxide. Spacers **109** may be along the sidewalls of gate electrode **108** and may therefore be considered sidewall spacers.

Channel **105** may be under a tensile strain from any stressor source. As discussed, a tensile strain in channel **105** may improve the performance of NMOS transistor **101**. In an embodiment, a layer **110** may cover NMOS transistor **101** and PMOS transistor **102** and layer **110** may provide a tensile stress on channel **105** and channel **112** and may therefore be considered a tensile layer or a stressor. In an embodiment, layer **110** may include a silicon nitride, such as Si<sub>3</sub>N<sub>4</sub>. Layer **110** may be formed by any suitable technique. In an embodiment, a tensile strain in channel **112** may diminish the performance of PMOS transistor **102**; however, due to source and drain films **113**, channel **112** may be under a net compressive strain.

As discussed, channel **105** may be under a tensile strain due to layer **110**. However, channel **105** may be under a tensile strain from any suitable stressor material or source. In an embodiment, source and drain regions **106** may provide a tensile strain on channel **105**. In an embodiment, source and drain regions **106** may be epitaxial and may have a smaller lattice spacing constant than p-well **104** and channel **105**. Source and drain regions **106** may then be constrained from achieving their natural lattice spacing and may transfer a tensile strain on channel **105** as they tend to, but are constrained from, contracting to their natural lattice spacing. In an embodiment, source and drain regions **106** films may include carbon.

NMOS transistor **101** and PMOS transistor **102** may also include other features that are not shown for the sake of clarity, such as halo implants, tip implants, silicide regions, and the like.

As illustrated in FIG. 2, a portion of layer **110** may be removed to expose gate electrode **108** and gate electrode **115**. In an embodiment, a portion of layer **110** may be removed by a planarization or chemical mechanical polishing (CMP) process. In an embodiment, a portion of gate electrodes **108**, **115** may also be removed.

As illustrated in FIG. 3, gate electrodes **108**, **115** and gate dielectrics **107**, **114** may be removed to form trenches **121**, **122**. Gate electrodes **108**, **115** and gate dielectrics **107**, **114** may be removed by any suitable technique, such as a selective etch technique.

As discussed, channel **105** may be under a tensile strain and channel **112** may be under a compressive strain. Due to the removal of gate electrodes **108**, **115** and gate dielectrics **107**, **114**, the strain on channels **105**, **112** may be increased or enhanced. The increased strain may be due to the removal of material from trenches **121**, **122**, which may have been offsetting the desired stresses. In general, removing a portion or the entirety of a gate structure may remove an offsetting stress and allow the stressor to relax, which may increase the strain on the transistor channel. In other words, removing the gate structure may allow the stressor to enhance the desired strain on the channel.

In an embodiment, NMOS transistor **101** may include a stressor that is relaxed to increase a tensile strain on channel **105**. In an embodiment, the stressor may include layer **110**. In another embodiment, the stressor may include source and drain regions **106**. In an embodiment, PMOS transistor **102** may include a stressor that is allowed to increase a compressive strain on channel **112**. In an embodiment, the stressor may include source and drain films **113**.

5

As illustrated in FIG. 4, a gate dielectric **131** may be formed in trenches **121**, **122**. Gate dielectric **131** may be any suitable material and may be formed by any suitable technique. In an embodiment, gate dielectric **131** may include a high-k gate dielectric, such as hafnium oxide. In various other embodiments, gate dielectric **131** may include hafnium silicon oxide, lanthanum oxide, zirconium oxide, zirconium silicon oxide, tantalum oxide, titanium oxide, barium strontium titanium oxide, barium titanium oxide, strontium titanium oxide, yttrium oxide aluminum oxide, lead scandium tantalum oxide, or lead zinc niobate. In another embodiment, gate dielectric **131** may include silicon dioxide.

In an embodiment, gate dielectric **131** may be formed by a deposition process, such as chemical vapor deposition (CVD). As illustrated in FIG. 4, gate dielectric **131** may be formed along the bottom of trenches **121**, **122** and along the sidewalls of trenches **121**, **122**. In an embodiment, gate dielectric **131** may also be formed over layer **110** (not shown). In such embodiments, gate dielectric **131** may be subsequently removed from layer **110** by a CMP process such that gate dielectric **131** only remains in trenches **121**, **122**.

As illustrated in FIG. 5, a gate electrode **141** and a gate electrode **142** may be formed. Gate electrode **141** may include any suitable material or materials. In an embodiment, gate electrode **141** may include an n-doped polysilicon. In another embodiment, gate electrode **141** may include a metal with an n-type work function. In other embodiments, gate electrode **141** may include a stack or structure of materials with the material in contact with gate dielectric **131** including a material with an n-type work function. In various embodiments, the n-type work function material may include hafnium, zirconium, titanium, tantalum, aluminum, their alloys, or carbides of those metals.

In an embodiment, gate electrode **141** may include a material that provides an additional tensile strain on channel **105**. Gate electrode **141** may provide an additional tensile strain on channel **105** by including a material with a coefficient of thermal expansion (CTE) less than the CTE of substrate **103** that is deposited at a temperature greater than room temperature and the operating temperature of NMOS transistor **101**. Upon cooling, gate electrode **141** may contract more slowly than the surrounding materials and gate electrode **141** may then transfer a tensile strain to channel **105** via gate dielectric **131** or via spacers **109**. In an embodiment, the material that provides the additional tensile strain may be the n-type work function metal, as listed above. In other embodiments, the material that provides the additional tensile strain may be another material in the gate structure. In an embodiment, the material that provides the additional tensile strain may include tungsten. In another embodiment, the material that provides the additional tensile strain may include titanium carbide.

Gate electrode **142** may include any suitable material or materials. In an embodiment, gate electrode **142** may include a p-doped polysilicon. In another embodiment, gate electrode **142** may include a metal with a p-type work function. In other embodiments, gate electrode **142** may include a stack or structure of various materials with the material in contact with gate dielectric **131** including a material with a p-type work function. In various embodiments, the p-type work function material may include ruthenium, palladium, platinum, cobalt, nickel, and their oxides.

In an embodiment, gate electrode **142** may include a metal that provides an additional compressive strain on channel **112**. Gate electrode **142** may provide an additional compressive strain on channel **112** by including a material with a CTE greater than the CTE of substrate **103** that is deposited at a

6

temperature greater than room temperature and the operating temperature of PMOS transistor **102**. Upon cooling, gate electrode **142** may contract more quickly than the surrounding materials and gate electrode **142** may then transfer a compressive strain to channel **112** via gate dielectric **131** or via spacers **116**. In an embodiment, the material that provides the additional compressive strain may be the p-type work function metal, as listed above. In other embodiments, the material that provides the additional compressive strain may be another material in the gate structure. In various embodiments, the material that provides the additional compressive strain may include boron carbide, tungsten, molybdenum, rhodium, vanadium, platinum, ruthenium, beryllium, palladium, cobalt, titanium, nickel, copper, tin, aluminum, lead, zinc, alloys of these metals, or their silicides.

Gate electrode **141** and gate electrode **142** may be formed by any suitable technique. In an embodiment, gate electrode **141** may be selectively formed and then gate electrode **142** may be selectively formed. In an embodiment, gate electrode **142** may be selectively formed and then gate electrode **141** may be selectively formed.

FIGS. 6-8 illustrate a method for forming gate electrodes with reference to the illustration of FIG. 4. As illustrated in FIG. 6, an n-type material **161** may be formed in trenches **121**, **122**. N-type material **161** may be any suitable n-type work function material as discussed above with reference to FIG. 5. In an embodiment, n-type material **161** may partially fill trenches **121**, **122**. In another embodiment, n-type material **161** may completely fill trenches **121**, **122**.

As illustrated in FIG. 7, n-type material **161** may be selectively removed from PMOS transistor **102** and a p-type material **162** may be formed. P-type material **162** may be any suitable p-type work function material as discussed above with reference to FIG. 5. In an embodiment, p-type material **162** may be formed such that an opening remains in either or both of the trenches. In another embodiment, p-type material **162** may complete the gate structure of PMOS transistor **102** or NMOS transistor **101**.

As illustrated in FIG. 8, fill material **171** and fill material **172** may be selectively formed. Fill materials **171**, **172** may be the same material or they may be different. In an embodiment, fill material **171** and fill material **172** may be chosen based on their conductive properties. In another embodiment, fill material **171** may be chosen to provide a tensile strain on NMOS transistor **101** as discussed with respect to FIG. 5. In various embodiments, fill material **171** may include tungsten or titanium carbide.

Fill material **172** may also include any suitable material. In an embodiment, fill material **172** may be chosen to provide a compressive strain on PMOS transistor **102** as discussed with respect to FIG. 5. In some embodiments, fill material **172** may include boron carbide, tungsten, molybdenum, rhodium, vanadium, platinum, ruthenium, beryllium, palladium, cobalt, titanium, nickel, copper, tin, aluminum, lead, zinc, alloys of these metals, or their silicides.

As illustrated in FIGS. 6-8, n-type material **161** may be formed and selectively removed, p-type material **162** may be formed, and optional fill materials may be formed. In another embodiment, the n-type and p-type materials may be formed in the opposite order. For example, the p-type material may be formed first. Then, the p-type material may be selectively removed from NMOS transistor **101** and a subsequent n-type material may then be formed. Lastly, optional fill materials may then be formed.

The illustrated methods of FIGS. 3-8 show trenches **121**, **122** being formed and the stressors on channels **105**, **112** being allowed to simultaneously increase the strain on chan-



nels **105**, **112**. However, in other embodiments, trenches **121**, **122** may be formed and the strains increased independently. In an embodiment, trench **121** may be formed while gate dielectric **114** and gate electrode **115** remain. The strain on channel **105** of NMOS transistor **101** may then be independently increased. In another embodiment, trench **122** may be formed while gate dielectric **107** and gate electrode **108** remain. The strain on channel **112** of PMOS transistor **102** may then be independently increased.

The methods illustrated in FIGS. **3-8** show the entire gate structure being sacrificial. As illustrated in FIGS. **9-10**, only a portion of the gate structure may be sacrificial.

In FIG. **9**, gate electrodes **108**, **115** may be removed from the structure of FIG. **2** to form trenches **151**, **152**. Gate electrodes **108**, **115** may be removed by any suitable technique such as a selective etch technique.

Due to the removal of gate electrodes **108**, **115** the strain on channels **105**, **112** may be increased. The increased strain may be due to the removal of material from trenches **151**, **152**, which may have been an offsetting stress to the desired stresses as discussed above.

As illustrated in FIG. **10**, gate electrodes **141**, **142** may be formed. Gate electrodes **141**, **142** may include any of the materials or attributes and may be formed by any of the methods as discussed above with respect to FIGS. **5-8**.

Reference throughout this specification to “one embodiment” or “an embodiment” means that a particular feature, structure, material, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. Thus, the appearances of the phrases “in one embodiment” or “in an embodiment” in various places throughout this specification are not necessarily referring to the same embodiment of the invention. Furthermore, the particular features, structures, materials, or characteristics may be combined in any suitable manner in one or more embodiments.

It is to be understood that the above description is intended to be illustrative, and not restrictive. Many other embodiments will be apparent to those of ordinary skill in the art upon reviewing the above description. The scope of the invention should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled.

What is claimed is:

**1.** A method comprising:

forming an NMOS transistor on a substrate, wherein the substrate further comprises a PMOS transistor disposed thereon, wherein the NMOS transistor comprises a first channel, a first gate structure disposed on the first channel, and first sidewall spacers adjacent the first gate structure;

forming a stressor over the first gate and the first sidewall spacers wherein the stressor comprises a tensile layer; removing a portion of the stressor from over the gate structure and leaving a portion of the stressor on the spacers; forming a first trench in the first gate structure after removing the portion of the stressor from the over the gate structure;

forming a first high-k gate dielectric in the first trench; forming an n-type work function material on the first high-k gate dielectric disposed in the first trench; and forming a first metal gate electrode over the n-type work function material.

**2.** The method of claim **1**, wherein forming the first trench comprises removing portion of the first gate structure by removing a first gate electrode and a first gate dielectric, and wherein removing a portion of the first gate structure increases a tensile strain on the first channel.

**3.** The method of claim **1**, further comprising: wherein the first metal gate electrode provides an additional tensile strain in the first channel.

**4.** The method of claim **3**, wherein the first channel is stressed via the first high-k gate dielectric.

**5.** The method of claim **3**, wherein the first channel is stressed via the first sidewall spacers.

**6.** The method of claim **3**, wherein the first metal gate electrode includes at least one of tungsten or titanium carbide.

**7.** The method of claim **3**, further comprising:

wherein the PMOS transistor comprises a second gate structure disposed on a second channel, a second stressor disposed on the second gate structure, and second sidewall spacers adjacent the second gate structure;

forming a second trench in the second gate structure;

forming a second high-k gate dielectric in the second trench; and

forming a second metal gate electrode over the second high-k gate dielectric.

**8.** The method of claim **7**, wherein the second metal gate electrode comprises a material having a coefficient of thermal expansion that is greater than the coefficient of thermal expansion of the second channel, and wherein the second metal gate electrode provides an additional compressive strain in the second channel.

**9.** The method of claim **2**, further comprising:

forming a silicon dioxide gate dielectric in the first trench; and

forming a polysilicon gate electrode over the silicon dioxide gate dielectric.

\* \* \* \* \*